

**Oakley Sound Systems**

# **Stereo Ensemble – SE330**

**PCB Issue 1**

## **Builder's Guide**

**V1.10**

Tony Allgood  
Oakley Sound Systems  
CARLISLE  
United Kingdom

# Introduction

This is the Builder's Guide for the issue 1 Stereo Ensemble Module SE330 from Oakley Sound. This document contains a basic introduction to the circuit board and a full parts list for the components needed to populate the board or boards.

For the User Manual, which contains an overview of the unit and goes into some detail regarding the operation of the module, please visit the main project webpage at:

<http://www.oakleysound.com/se330.htm>

For general information regarding where to get parts and suggested part numbers please see our useful Parts Guide at the project webpage or <http://www.oakleysound.com/parts.pdf>.

For general information on how to build our modules, including circuit board population, mounting front panel components and making up board interconnects please see our generic Construction Guide at the project webpage or <http://www.oakleysound.com/construct.pdf>.


This is an early version of the documentation. If you do find any errors, even silly little ones, please do let me know either directly by e-mail or via the forum.

## The Oakley Sound SE330

The SE330 does not have any built in power supply. It is expected that the circuit board be powered from a regulated split supply of +/-12V to +/-17V. Power is admitted onto the board via a four way 0.156" (2.96mm) header of MTA or KK type.

The module is designed to be powered by our own Rack Power Supply Unit (RPSU) or any other split rail compatible supply such as the Oakley PSU. The benefits of using the RPSU is its small size and ability to take a variety of different AC power sources. Because of the inherent dangers of using a component level mains transformer in your project I recommend that you use an external low voltage AC source such as that obtained from a wallwart or line lump. The RPSU can then be fed from a low voltage alternating current supply so all the high voltages are kept inside the wallwart or line lump. The User Manual for the RPSU will go into more detail of the various options for powering your unit. A single RPSU should be capable of driving both the HVM and SE330 should both projects be built into the same case.

The board size is 198mm (width) x 234mm (depth). Power consumption of the SE330, with no audio passing through it, is +140mA and -110mA at +/-15V.

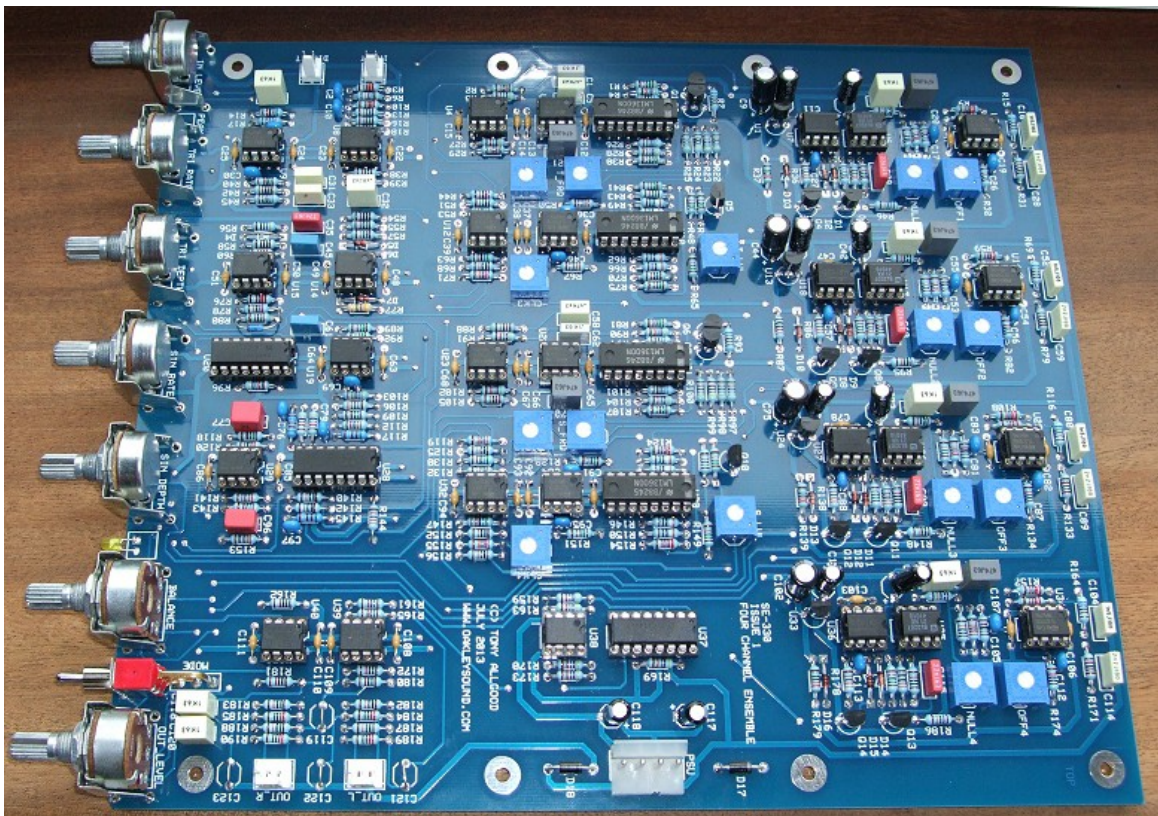

*A completed issue 1 SE330 circuit board awaiting its case.*

## Parts List

For general information regarding where to get parts and suggested part numbers please see our useful Parts Guide at the project webpage or <http://www.oakleysound.com/parts.pdf>.

The components are grouped into values, the order of the component names is of no particular consequence.

A quick note on European part descriptions. R is shorthand for ohm. K is shorthand for kilo-ohm. So 22R is 22 ohm, 1K5 is 1,500 ohms or 1.5 kilohms. For capacitors: 1uF = one microfarad = 1000nF = one thousand nanofarad.

To prevent loss of the small '.' as the decimal point, a convention of inserting the unit in its place is used. eg. 4R7 is a 4.7 ohm, 4K7 is a 4700 ohm resistor, 6n8 is a 6.8 nF capacitor.

**NOTE: This board requires two track cuts to allow it to work as intended. These are best done before you start to solder. Please see the Modifications section for the details on how to do this.**

### Resistors

All resistors 1% 0.25W metal film resistors except where stated.

220R	R189, R190, R185, R87, R139, R179, R37, R184
390R	R131, R150, R52, R128, R66, R49, R62, R146
470R	R56
510R	R145, R117, R115
1K	R58
3K3	R153, R34, R136, R84, R176
4K7	R24, R99
6K8	R69, R8, R164, R101, R26, R116, R94, R93, R45, R7, R15
10K	R54, R161, R165, R181, R180, R172, R162, R134, R70, R40, R38, R39, R174, R18, R16, R175, R55, R43, R32, R83, R82, R33, R135
11K	R31, R171, R42, R79, R133
15K	R48, R149, R47, R127, R129, R81, R75, R65, R151, R30, R41, R107, R89, R92, R1, R126, R109, R143, R118
18K	R166, R72, R121, R19
22K	R76, R59, R64, R3, R111, R124, R9, R154, R157, R160, R10, R60, R12, R80, R108, R6, R13
33K	R144, R112, R67, R120, R141, R50, R106, R36, R86, R178, R138
36K	R17
47K	R163, R102, R104, R96, R169, R170, R28, R5, R91, R27, R4, R173, R159, R90
56K	R53, R130, R63, R147
62K	R14

100K	R57, R168, R158, R110, R125, R148, R156, R152, R132, R68, R95, R51, R123, R183, R61, R114, R182, R186, R140, R142, R21, R11, R188, R187, R74, R46, R113
120K	R88, R29, R105, R2
150K	R177, R35, R85, R137
220K	R71, R73, R20, R119, R44, R167, R155, R122
270K	R78
470K	R103, R100, R97, R25, R22, R23, R98
4M7 5%	R77

## Capacitors

Do not fit C61 just yet as the topside copper track next to it needs to be cut. See modifications section for details.

Non-polar capacitors C119, C121, C122 and C123 are optional and can be replaced with wire links. They are used as DC blocking (sometimes called audio coupling) capacitors and are there to filter out unwanted steady state offset voltages from the final output amplifiers. However, I found that the OPA2134 produces such a small offset as to warrant the use of such capacitors superfluous.

100nF ceramic multilayer axial	C55, C92, C106, C78, C107, C110, C86, C109, C47, C103, C19, C68, C82, C54, C83, C11, C65, C48, C24, C22, C51, C25, C49, C20, C63, C50, C23, C12, C38, C93, C36, C14, C37, C15, C13, C67, C64, C39, C111, C66, C94, C85, C91, C108
100pF C0G ceramic 2.5mm	C88, C95, C84, C2, C46, C57, C27, C34, C10, C113, C69
220pF C0G ceramic 2.5mm	C87, C56, C112, C18, C30, C26
470pF C0G ceramic 2.5mm	C81, C17, C53, C105
560pF C0G ceramic 2.5mm	C97, C79, C76
2u2, 63V electrolytic	C101, C100, C7, C73, C74, C42, C43, C8
10uF, 35V electrolytic	C118, C117
10uF non polar electrolytic	C123, C119, C122, C121 – Optional, see note above.
47uF, 25V electrolytic	C9, C102, C75, C44
1nF, 100V polyester	C77, C96, C61
1n5, 100V polyester	C52, C16, C104, C80, C33
2n2, 100V polyester	C28, C31, C89, C114, C59
22nF, 63V polyester	C115, C60, C90, C29, C35
100nF, 63V polyester	C1, C62
330nF, 63V polyester	C45
470nF, 63V polyester	C98, C71, C21, C5, C40, C58, C3, C70
680nF, 63V polyester	C32
1uF, 63V polyester	C116, C4, C72, C99, C6, C120, C41

## Discrete Semiconductors

1N5819 Schottky diode	D17, D18
1N4148 small signal diode	D1, D2, D3, D5, D6, D7, D8, D9, D10, D11, D12, D13, D14, D15, D16
1N4148 small signal diode	To be soldered across R80. See modifications section.
3.6V 500mW zener diode	Two required across R103. See modifications section.
BC550 NPN transistor	Q9, Q4, Q11, Q13, Q8, Q14, Q12, Q3
BC560 PNP transistor	Q5, Q6, Q10, Q2, Q1, Q7
Green or yellow 3mm LED	ON
Red 3mm LED	PEAK

D4 is not a diode but a wire link. Use a small piece of uninsulated wire like a resistor wire clipping.

## Integrated Circuits

78L09 +9V 100mA regulator	U13, U33, U1, U24
LM13700 dual OTA	U10, U21, U30, U2
V3102D Coolaudio BBD driver	U7, U18, U27, U36
BL3207 Coolaudio BBD	U17, U35, U26, U6
DG403 analogue switch	U37, U20
OPA2134PA dual op-amp	U19, U40, U8, U39
TL072 dual op-amp	U23, U11, U22, U15, U32, U38, U16, U29, U5, U34, U12, U31, U4, U25, U3, U14
NE5532 dual audio op-amp	U9
V2164D quad VCA	U28

IC sockets are recommended. You need 29 8-pin DIL sockets and 7 16-pin DIL sockets.

## Trimmers

20K or 22K 6mm	S_LVL, T_LVL
100K 6mm	OFF1, OFF2, OFF3, OFF4, CLK1, CLK2, CLK3, CLK4, T_FRQ, S_FRQ
4K7 or 5K 6mm	NULL1, NULL2, NULL3, NULL4

## Pots

All pots 16mm Alpha or Alps types.

47K or 50K linear dual gang	BALANCE, OUT_LEVEL
10K linear	IN_LEVEL
47K or 50K linear	TRI_RATE, TRI_DEPTH, SIN_RATE, SIN_DEPTH

Seven Alpha pot brackets. Seven knobs to suit.

## Switch

SPDT (on-off-on) toggle switch                      MODE

## Interconnects

4 way 3.96mm Molex KK or MTA header      PSU  
2 way 0.1" Molex KK or MTA header          INPUT  
3 way 0.1" Molex KK or MTA header          OUT\_L, OUT\_R

The 2-way header DIRECT is unused.

1/4" TRS jack sockets (plastic frame)          3 off

## Note:

Don't forget to solder a wire link in place of D4. Without this the peak LED won't work.

## Required Modifications


The SE330 was a complex project so it was somewhat inevitable that working alone I would end up making a few mistakes. It is typical, even on mass produced items, to find some degree of re-working on any early issue PCB. Thankfully, my mistakes are pretty easy to rectify so you dear builder will not have to alter the board too much. The tracking errors and missing components will be corrected in any new issue of the board but given the cost of the first run of SE330 boards it would be uneconomic and somewhat wasteful to dump them.

There are three modifications to do: Track cuts and jumper, the VCA maximum gain mod, and the soft limiter mod.

### Track Cuts

It is a rare thing to find a board design from me that requires track cuts, so it is with some shame that I am asking you to do this. First you need to get a very sharp knife, the little aluminium craft knives from X-acto and others are just the thing. Use a fresh blade as using a blunt one can give poor results and is more likely to slip.

This is most easily done before you start to solder, however, it can be done with all the parts in place except C61. On the topside of the board find C61's location. To the right of it you will see a copper track in light blue heading from the top hole of C61 to a via hole in between the TRI\_DEPTH and SIN\_RATE pots. You need to cut this track near C61. Make two cuts in the track about 2mm apart from each other. Make sure the cuts go deep enough to slice through the copper trace. Then with your knife peel back the section of trace between your cuts. The tiny strip should peel off in one piece but it may need several picks to get it all out.

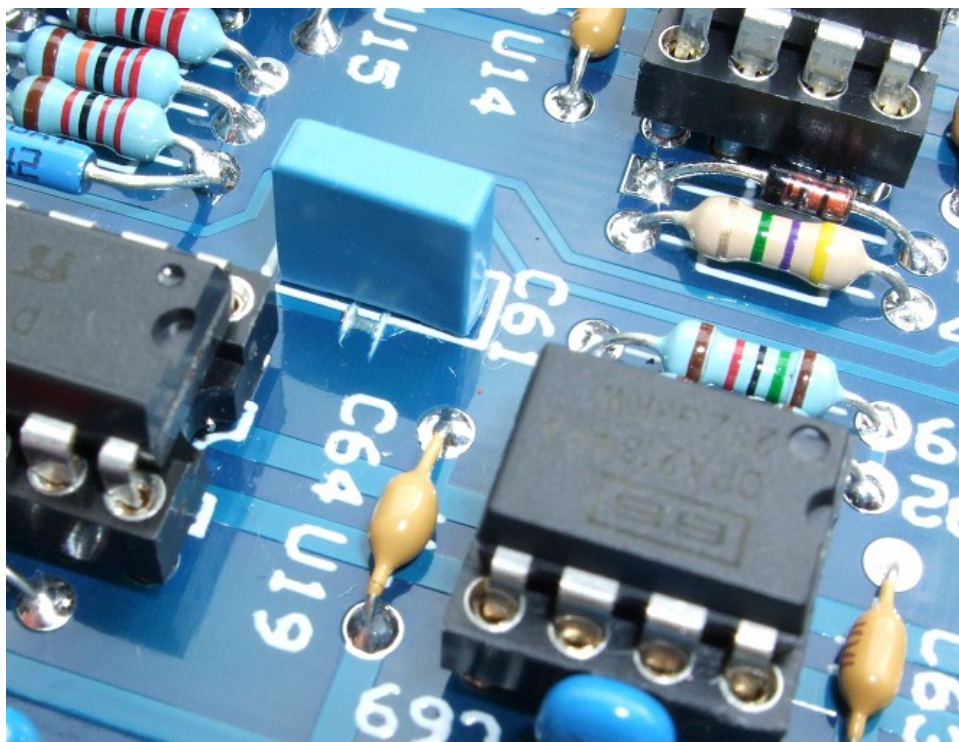


*The topside track cut next to C61 as seen with the board populated.*



The next track cut is on the underside but you will need to refer to the topside to find the track you need to cut. Find R92, it's just above C61. Now flip the board over and locate the lower solder pad of R92. You'll see a copper track coming from the square pad of U19 going to the lower solder pad of R92 and then continuing down to a Y junction where one branch goes to C61 and the other makes its way to R106. You need to cut the track between the lower pad of R92 and the Y junction. Again make two cuts 2mm apart and peel off the little piece of track.

You may wish to use a resistance meter to check that both tracks have been cut.

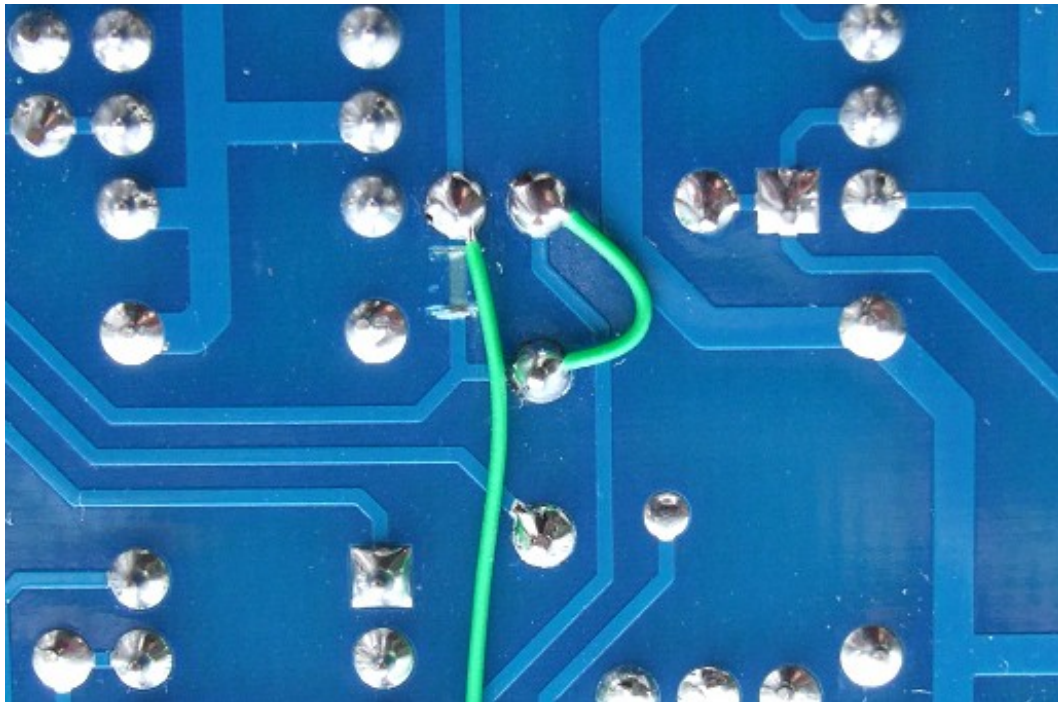

*The second track cut. Ignore the two jumper wires for now.*

You can now populate the board as described in the parts list. Once that is done you can continue the modifications.


### **Jumper Wires**

Now that we have cut the misplaced signals we now have to re-route them to the correct places. This involves fitting two jumper wires. Both jumper wires are fitted to the underside of the board. I use thin insulated solid core wire called Kynar wire. It's especially made for making jumper connections on the backs of PCBs. However, you can use any type of wire you like but the thinner solid core stuff is both neater and easier to work with.

The first jumper will connect the lower pad of R89 to the top pad of C61.

The second jumper will connect the lower solder pad of R92 to the lowest via pad between the two pots, TRI\_DEPTH and SIN\_RATE. A via pad is the small solder pad that allows the signal to normally be routed between the topside and bottom of the PCB.

I use a solder with an Ersin based flux as this makes soldering wires much easier than using the usual no-clean solder. It does, however, make a little more mess, with visible flux left on the board. This flux does no harm but can be removed with a propriety flux remover or a bit of iso-propyl alcohol (IPA).

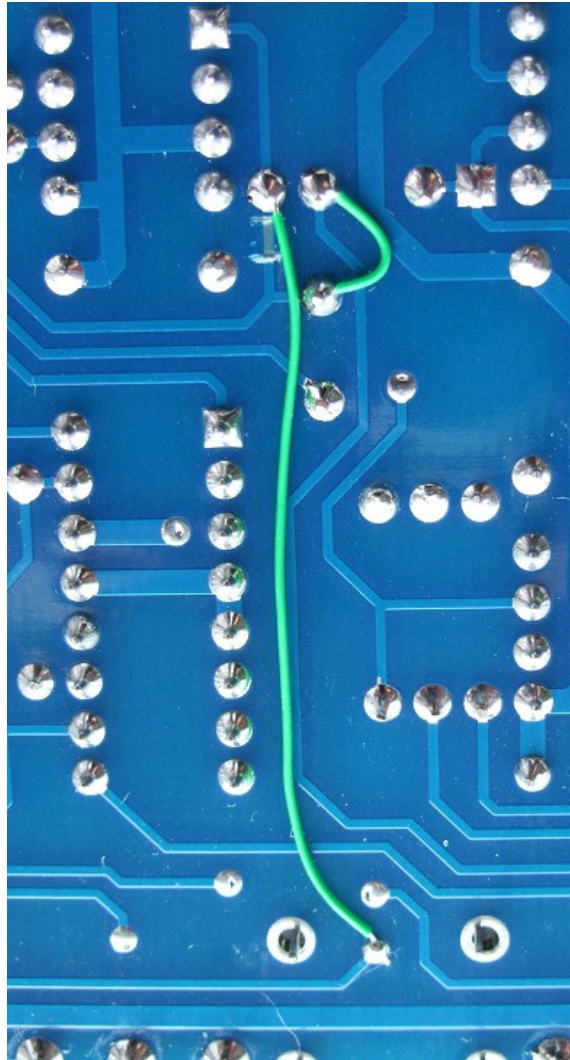


*Both jumper wires in place. Note the pot brackets haven't been soldered in yet.*

That completes the re-routing of the signals but there are two other modifications that need to be done. See the next pages for details.

## VCA maximum gain modification

In the parts list you'll see an additional 1N4148 diode. This is to be soldered across R80 on the topside of the board. The cathode of the diode, marked with a dark band, should be facing towards the front of the board. This modification prevents the VCAs in the noise reduction unit from being driven too hard and allowing horrible noises to be heard.

The diode needs to be trimmed carefully and the legs preformed so it fits gracefully across and above R80. There is no need to push it flat against the board. See photograph below.

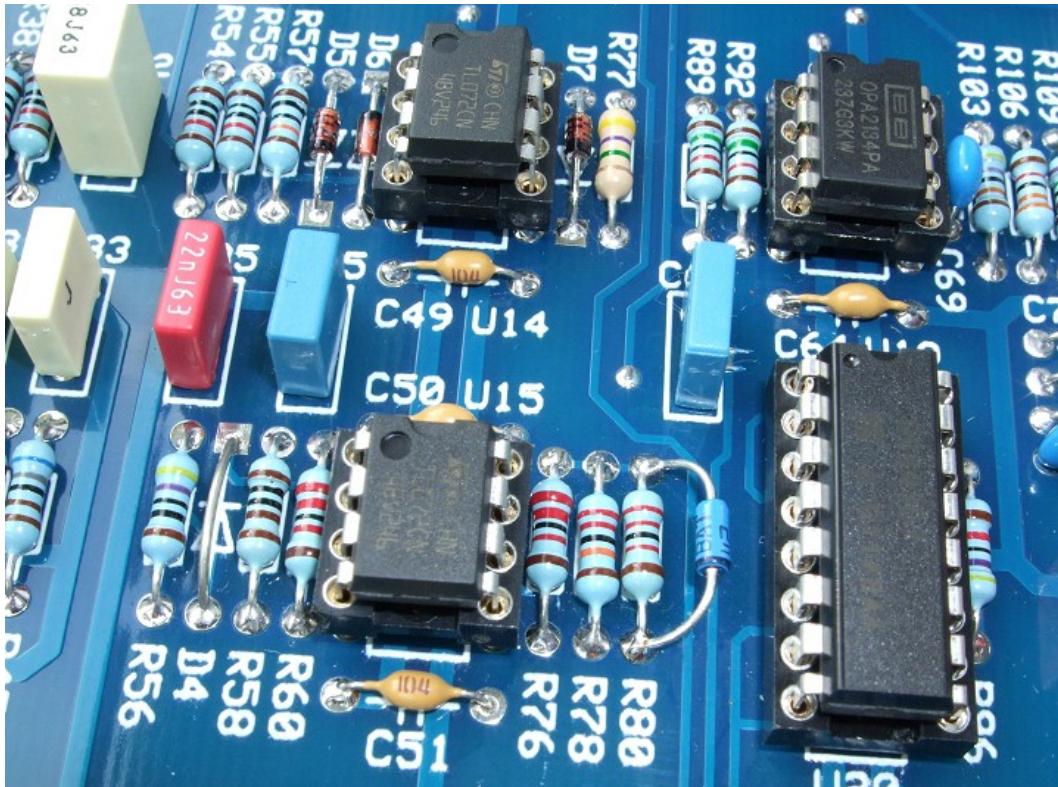

*The additional diode soldered across R80. Note also the wire link in position D4*


Originally the modification was done with a BAT42 as can be seen in the photograph. However, as soon as I implemented the 'soft limiter modification', as described overleaf, the VCA's gain could be taken that much higher than the BAT42 allowed. Using a 1N4148, the output of the VCA driver can be taken up to -600mV, which gives greater headroom for the companding noise reduction but not too much as to create instability.



## Soft limiter Modification

This modification instantaneously limits the signal level coming from the compressor that forms part of the noise reduction circuitry. By doing this the four BBDs lines are stopped from ever receiving really loud signals that would cause them to misbehave.


You need two 3.6V 500mW (0.5W) or 400mW (0.4W) zener diodes. These look very similar to ordinary signal diodes. You need to twist their leads together so that their anodes are connected together and the diode bodies form a Y shape. The cathode is denoted with a dark band on the body of the diode so these should be at the non twisted ends. Then, cutting off any excessive lead, solder the cathodes across R103 forming miniature upturned Y shape over R103. Don't forget to solder the twist too and cut the twisted bit nice and short so it won't stick up too far.

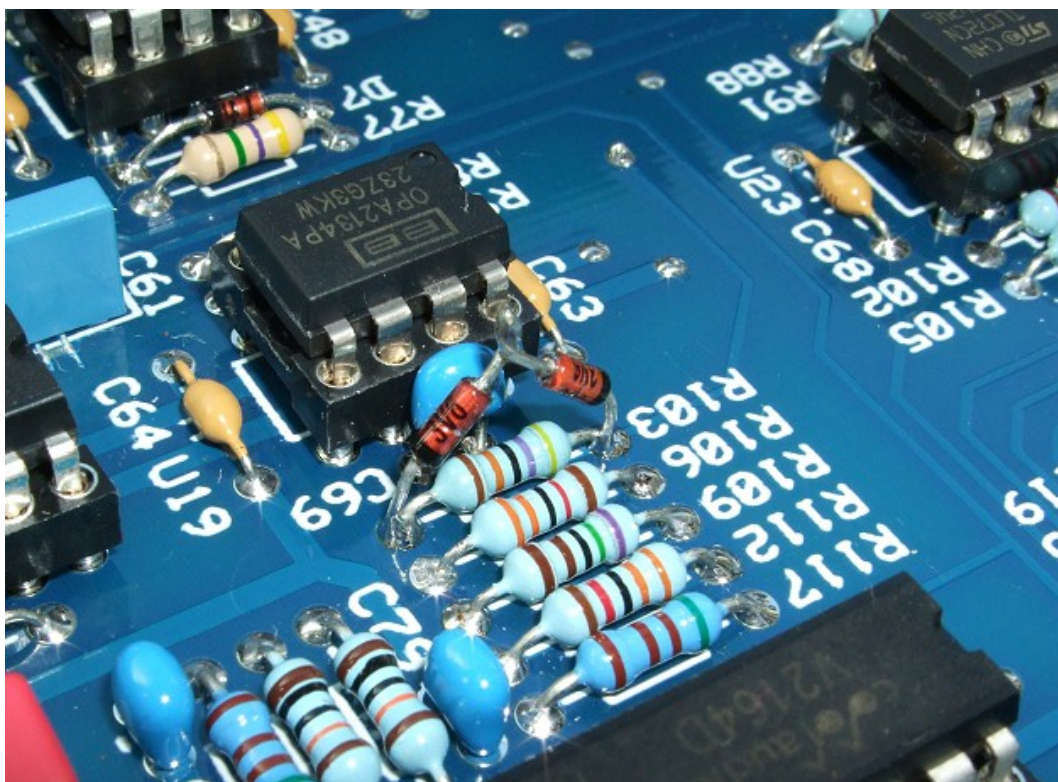

*Two back to back zener diodes fitted across R103.*

If you do make any other changes to the circuit do let the Oakley community know via our friendly online forum at Muffwiggles. I, for one, am always interested to hear what people do with their Oakley Sound projects.

## Mounting the Pots, LEDs and Switches

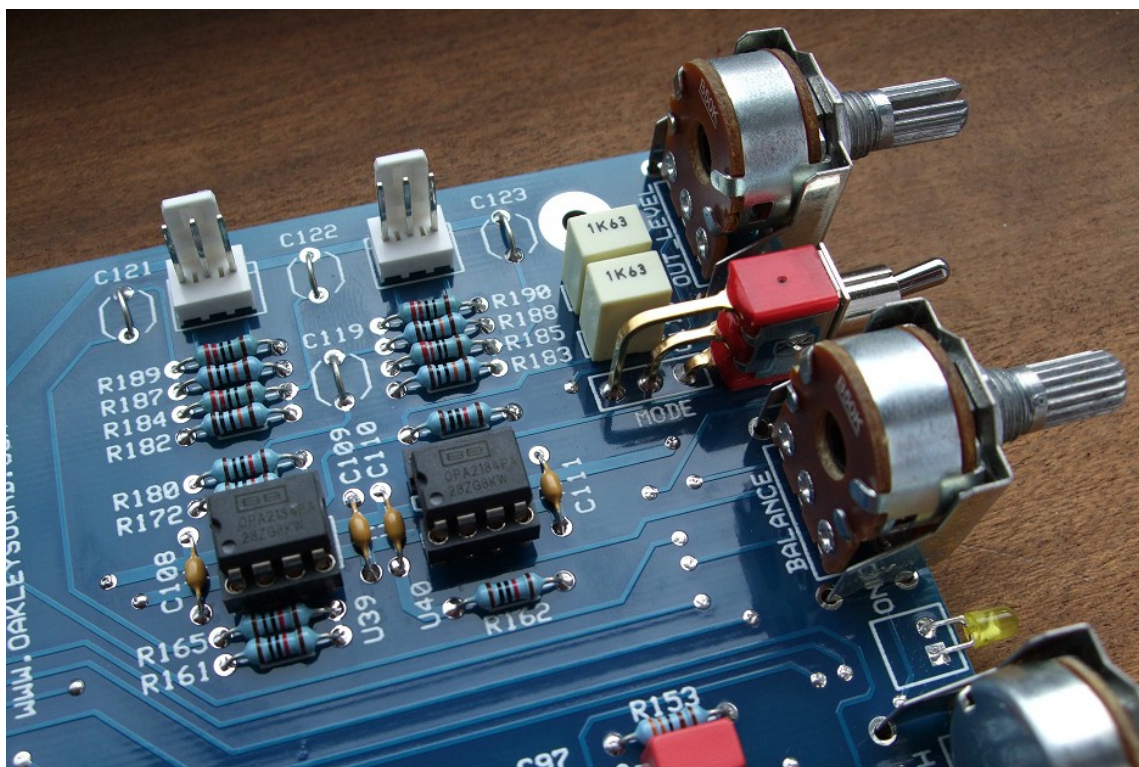

*A close up showing the two stereo (dual gang) pots, the power on LED and the three way toggle switch. Note also the optional output capacitors that have simply been linked out.*

If you are using the recommended Alpha pots then they can help support the PCB with the addition of the specially manufactured pot brackets. However, given the large size of the SE330 PCB it is also necessary to utilise some or all of the mounting holes at the edge of the board. These holes are sized to take an M3 screw and can be used with suitable hex spacers to fit the PCB directly to the lower panel of your case.

When constructing the board, temporarily fit the pot brackets to the pots by the nuts and washers supplied with the pots. Now fit them into the appropriate holes in the PCB. But only solder the three, or six, pins that connect to the pot. **Do not** solder the pot bracket at this stage. When you have soldered all the pots you can fit the board to your front panel. Position the PCB at right angles to the panel, the pot's own pins will hold it fairly rigid for now. Then you can solder each of the brackets. This will give you a very strong support and not stress the pot connections.

The Alpha pots are labelled with an A, B or C suffix. For example: 50KB or 10KC. Alpha and ALPS use the key; A = log, B = linear and C = reverse log. So a 50KB is a 50 kilohm linear pot. Remember you can use 47K in place of a 50K pot.

The two board mounted LEDs must be fitted carefully if you are using the directly mounted technique. Although this sounds fiddly, it's actually quite easy and it reduces wiring, interference and possible errors.

Remove the front panel so that you just have the board again. Get one of the LEDs and find the cathode. Make sure the cathode of the LED will go into the square pad, pin 1, on the board. Carefully bend the LED's legs at a point 6mm away from the plastic body of the LED. The legs should be bent by 90 degrees so that the legs are pointing straight down. Check to see if they fit into the board. The bottom of the LED's body should fit just flush to the board edge. Fit the LED to the board but do not solder it in at this stage. Let its legs poke through, there's no need to cut them down yet. Now fit the front panel again to the board and tighten the pot nuts. You should find that the board now fits snugly into position and the LED should be just poking out of its hole neatly, albeit loosely. Align the LED if it isn't quite straight and then solder it, trimming its leads nice and short afterwards. Now repeat the operation for the second LED.

With panel removed once again, you can now fit the switch. The PCB mountable switch should fit tightly into its respective holes on the board. Indeed, it will probably work for short time without soldering it in so don't forget to do so.

Make sure the switch body is flat against the board. Now refit the front panel and make sure the round switch barrel fits into its hole in the front panel. Now solder all the pins on each of the switches including the two securing pins to the front.

That completes the soldering of the front panel components.

## Power Supply

Power is admitted onto the board using the usual Oakley power system. That is a single four way 0.156" (3.96mm) MTA or Molex KK header. For the rack projects I am recommending the Molex system over the MTA simply because the tool needed to make the interconnects is much cheaper. It is also possible to solder the crimp terminals used in the KK system. It is, of course, quite possible to solder your power leads straight onto the board.

The board is protected against reverse polarity with a couple of Schottky diodes. Note that these diodes work by shorting out your power supply in the event of a reversal. Because of this they should not be relied on if the reversal continues for a long time as this will stress both the diodes and the power supply. The diodes are simply there to save the board's ICs from certain death in the event of the power being inadvertently reversed or partially removed during testing. There is no overvoltage protection so be careful not to put anything over +/- 17V into the board.

The pin out for the power connector, PSU:

Pin 1 +12V to +17V  
Pin 2 Ground (0V)  
Pin 3 Ground (0V)  
Pin 4 -12V to -17V

Pin 1 is indicated by the little diagonal on the header's legend.

Both ground connections need not be connected to your power supply. However, you do most certainly need at least one of them – either pin 2 or pin 3 will do if you using only one connection.

A special compact low voltage supply has been made for this, and other Oakley rack projects, in the form of the Oakley RPSU. You don't have to use this as any decent split rail supply will do but it is an easy build and is flexible enough to suit most builders' needs. Please see the RPSU Builder's Guide and User Manual for more details.

## Inputs and Outputs

If you are building the suggested design then you have only one input and two outputs. Both input and outputs are balanced and you should use TRS jack sockets. TRS, tip-ring-sleeve, sockets are ones with three poles and are also used for headphone outputs.

Even though both input and outputs are balanced they are still compatible with unbalanced signals. This means you can plug ordinary two pole mono jacks into the TRS sockets and the unit will work as expected.

Audio projects should really be built into metal cases to prevent interference and because of this we now face a bit of a conundrum. Ideally, balanced input and output sockets should be grounded to the case. If you have internal mains transformer then the case will be grounded via the power supply so this will ground the socket and any connecting cables. But this only works if your sockets have a metal frame and can be guaranteed to make a permanent electrical connection to the casing when they are tightened up. It also means that your PSU must be grounding the case directly which, unlike with the internal mains transformer, is not what I recommend when using an external wall wart.

Therefore I prefer to use plastic framed chassis mounted sockets for my rack projects. This allows the case to be grounded via the power supply and keep the sleeve terminals of all the sockets locally isolated from the case. Grounding the sockets must therefore be done via a short wire link back to either the PSU's main ground star point (which is not so easily done on the RPSU if both four way headers are being used) or the main SE330 PCB.

### **Input Socket**

The two way header, named INPUT, should be wired so that pin 1 goes to the ring of the input socket and pin 2 goes to the tip. Twist the wires together so that they form a simple cable. The sleeve, or ground, of the input socket does not connect directly to the PCB but should be connected to the sleeve terminal the left output socket.

### **Output Sockets**

The three way headers, named OUT\_L and OUT\_R, should each be wired so that pin 1 connects to the tip of the relevant output socket and pin 3 goes to the ring. Again twist the wires into pairs to form simple cables. The sleeve, or ground, terminal of left output socket should go to the sleeve terminal of right output socket. This then connects back to the board to pin 2 of the OUT\_R header. Pin 2 of the OUT\_L header is left unused.



## Final Comments

If you have any problems with the module, an excellent source of support is the Oakley Sound Forum at Muffwiggler.com. Paul Darlow and I are on this group, as well as many other users and builders of Oakley modules.

I'd love to hear about what you have done with your module. Please do post pictures of your finished module at the Oakley Sound forum on Muffwiggler.

And if you can't get your project to work, then Oakley Sound Systems are able to offer a 'get you working' service. If you wish to take up this service please e-mail me, Tony Allgood, at my contact e-mail address found on the website. I can service either fully populated PCBs or whole modules. You will be charged for all postage costs, any parts used and my time at 25GBP per hour. Most faults can be found and fixed within one hour, and I normally return modules within a week. The minimum charge is 25GBP plus return postage costs.

If you have a comment about this user guide, or have found a mistake in it, then please do let me know. But please do not contact me or Paul Darlow directly with questions about sourcing components or general fault finding. Honestly, we would love to help but we do not have the time to help everyone individually by e-mail.

Last but not least, can I say a big thank you to all of you who helped and inspired me. Thanks especially to all those nice people on Muff's Forum and the Synth-diy and Analogue Heaven mailing lists.

***Tony Allgood at Oakley Sound***

Cumbria, UK

© August 2013 – updated August 2016

No part of this document may be copied by whatever means without my permission.